



Powerterm P240-24 Power Supply

24V/10A DIN rail mount Industrial Power Supply

C2209A

DATASHEET

- Designed for:
 - Process Control
 - Factory Automation
 - General Industrial Applications
- All Round Protection:
 - Short Circuit
 - Over Voltage
 - Over Current
 - Over Temperature
- Cooling by free air convection - no fans



Features

- DIN Rail Mounted
- Universal Input 90-264Vac
- Adjustable 24Vdc Output



- LED Indicator for DC Power On and DC Low
- 100% Full Load Burn-in Test
- 3 Year warranty

Overview

The POWERTERM "P" range of DIN rail mount 24Vdc power supplies is specifically designed for industrial instrumentation applications. Use of carefully selected long-life components and conservative design parameters ensure increased reliability even in harsh conditions.


The POWERTERM P240-24 is part of the range POWERTERM industrial power supplies and battery chargers from Omniflex.

This third-generation family of power supplies uses the latest switch-mode supply technology to reduce cost, increase reliability and meet international safety and compatibility standards.





Connection Diagram

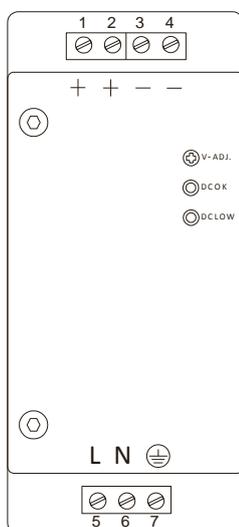

Marking	No.	Assignment
+	1	DC(+) Output Terminal
+	2	
-	3	DC(-) Output Terminal
-	4	
L	5	AC(L) Input Terminal
N	6	AC(N) Input Terminal
⊕	7	AC Grounding Terminal
V-ADJ.	/	DC Output voltage adjustment trimmer
DC OK	/	DC Output OK indication LED(Green)
DC LOW	/	DC Output Low indication LED(Red)





Powerterm P240-24 Power Supply

24V/10A DIN rail mount Industrial Power Supply

C2209A

Mechanical Detail

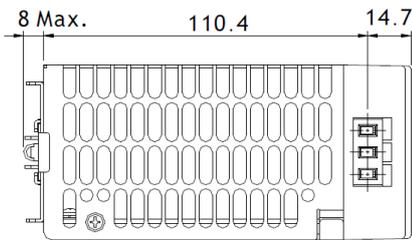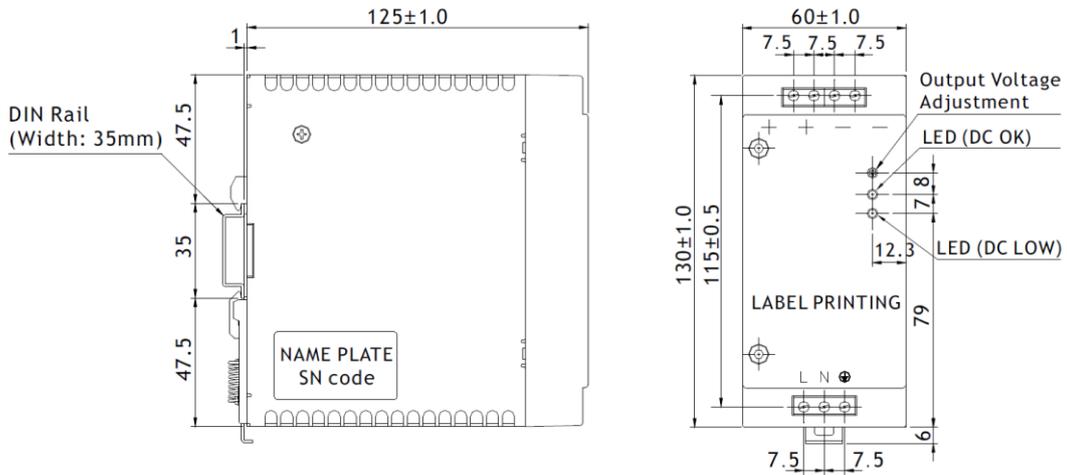


Unit: mm
Tolerance: ±1.0

Power Supply Installation


Installing:

First hang the power supply by the clip A on the top of the rail as shown below, then push the power supply in direction B until securely clipped to the DIN rail

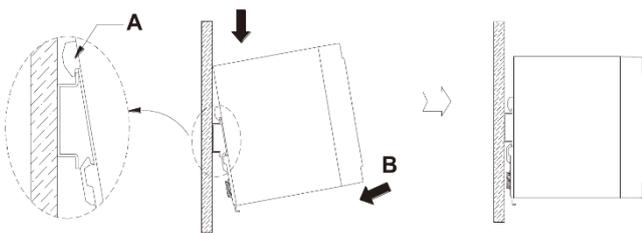


Removing:

Pull clip C down with a flat screwdriver then left the bottom of the power supply away from the DIN rail in direction D


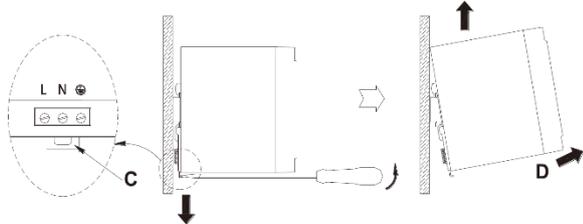


Allow space when mounting for ventilation:

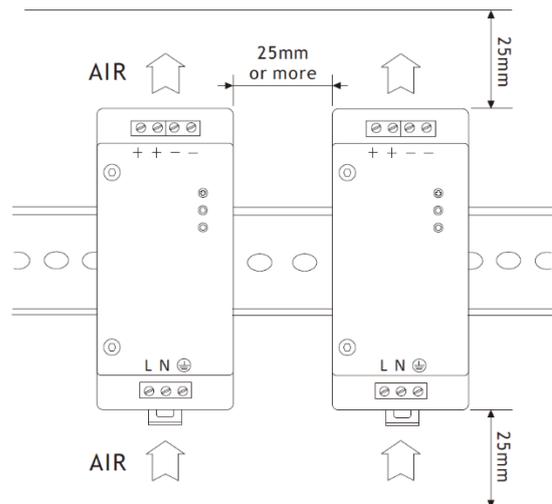




Derating Curve

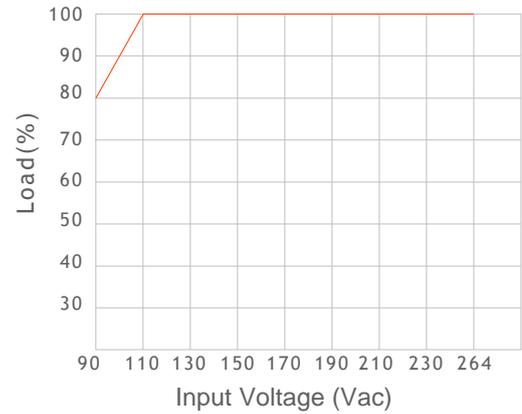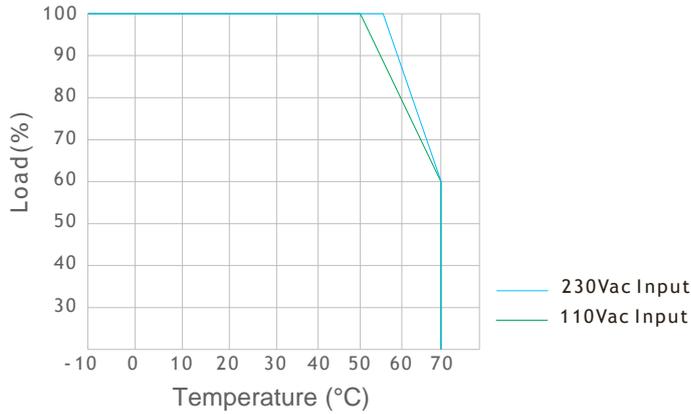

Block Diagram

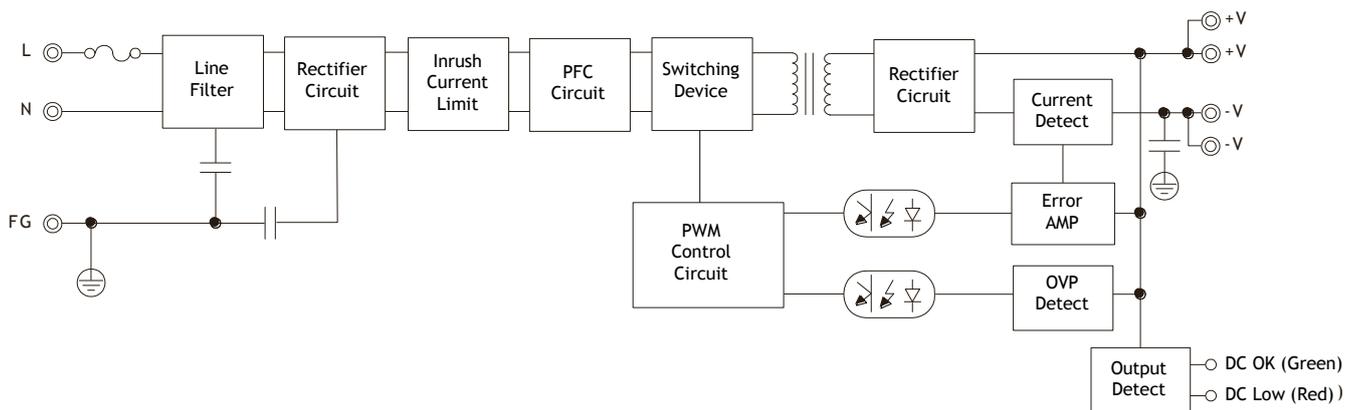



Powerterm P240-24 Power Supply C2209A

24V/10A DIN rail mount Industrial Power Supply

Specifications

AC Input

AC input voltage range	90-264Vac
AC input frequency	47-63 Hz
Input current at full load	<2.6A rms at 115Vac <1.3A rms at 230Vac
Cold Start switch-on inrush current	35A at 115Vac 65A at 230Vac

Notes:

- This product has built in inrush current limiting to protect the circuit from surge current damages when the power is turned on. Malfunction can occur by turning the input voltage on and off rapidly. Therefore sufficient interval should be given between turning on and off the power.

Power Factor (PF)	0.99 at 115Vac 0.96 at 230Vac
Surge withstand	2.5kA 8/20us pulse 40 joules max
Fast Transients	2 kV

DC Outputs (Terminals 1,2 and 3,4)

Output Voltage Range	22-28Vdc (adjustable)
Output Current Range	0-10A
Maximum Continuous Power	240 Watts at 50°C ambient (see de-rating curve up to 70°C)
Minimum load	0%
AC line regulation	2% max from 100-240Vac
Load Regulation	3% max over 0-100% of total load
Output Ripple	1% of V_{out} mV _{pp}
Efficiency	90% at full load
Turn on delay time	3600ms at full load ($V_{in}=115Vac$)
Hold up time	20ms at full load ($V_{in}=115Vac$)

Indicator Lights

DC OK (Green)	ON during normal operation
DC LOW (Red)	ON when: 1. Output voltage < 85%(±2.5%) from the rated output voltage; 2. Either over voltage, over current, over temperature and short circuit fault
DC LOW (Red)	DC Output Low when ON when: (1) Output voltage is below 85%(±2.5%) from the rated output voltage; (2) Either over voltage, over current, over temperature and short circuit fault

Protection

Short circuit	Hiccup mode, it will recover automatically after fault condition is removed
Over Voltage (See note 1 & 2)	Over voltage protection value 33V
Over Current (See note 3 & 4)	Over current protection value 11A
Over Temperature (note 5 & 6)	Over temperature value: 110±10°C

Notes:

- When output voltage exceeds the over-voltage protection value or reverse voltage occurs, the protection will trigger, and the output voltage will be cut off in order to protect the power supply.
- The power supply will recover after power is turned on again.
- When output voltage exceeds the over-current protection value, the protection trigger and the output voltage will be cut off in order to protect the power supply;
- The power supply will recover automatically after the fault condition is removed.
- When the ambient temperature exceeds the over-temperature protection value, the protection will trigger and go into "hiccup" mode;
- The power supply will recover automatically after the fault condition is removed

Environment

Operating Temperature	-25 to +70°C at full load
Relative Humidity	20 to 95%
Storage Temperature	5 – 95% Relative Humidity -40°C – 85°C (+40°F – 185°F)
MTBF at 25°C full load	230,000 hours

Mechanical

Width	60mm
Height	130mm
Depth	125mm
Mounting orientation	vertical only
Ventilation Space	25mm minimum above and below

Weight

Unpacked	1000gm approx.
Packed	1100gm approx.

Compliance to Standards

Safety	UL60950-1, EN60950-1
EMC	EN 55022:2010+AC:2011 (CISPR 22:2008) Class B EN 61000-3-2:2014 (IEC 61000-3-2:2014) EN 61000-3-3:2013 (IEC 61000-3-3:2013) EN 55024:2010 (CISPR 24:2010)
Insulation Resistance (100% tested)	100Mohm at 500Vdc
Insulation Breakdown (100% tested)	I/P-O/P: 3KVac, I/P-FG: 1.5KVac, O/P-FG: 0.5KVac

NOTE: Unless otherwise specified, all the above parameters are measured at ambient temperature of 25 °C and $V_{in}=100Vac$ to 240Vac.


Ordering Information

ORDER CODE	DESCRIPTION
C2209A	Powerterm P240-24 10A Industrial Power Supply







Applications: Parallel Operation

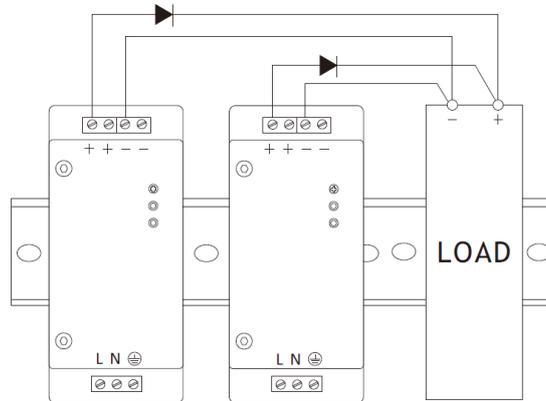

RECOMMENDED METHOD OF PARALLEL OPERATION

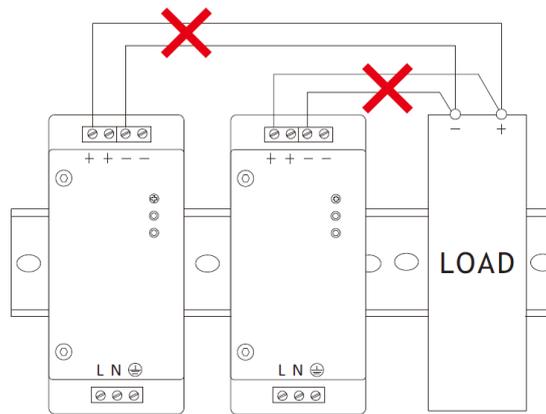

NOT ALLOWED

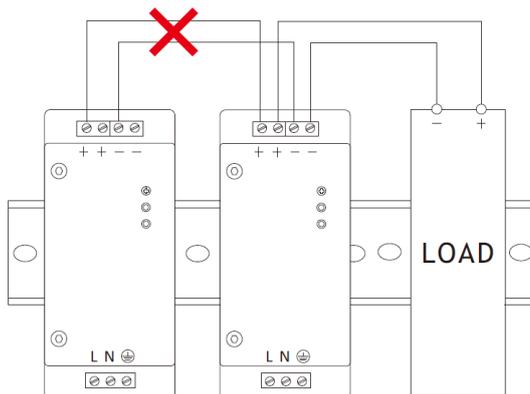


NOT ALLOWED

Notes:


1. Parallel operation is recommended for redundancy only. Not for increasing current output capacity.
2. Only use products of the same model number in parallel.
3. Choose diodes for maximum power supply current
4. Take diode volt drop into account when setting load voltage.



Applications: Series Operation

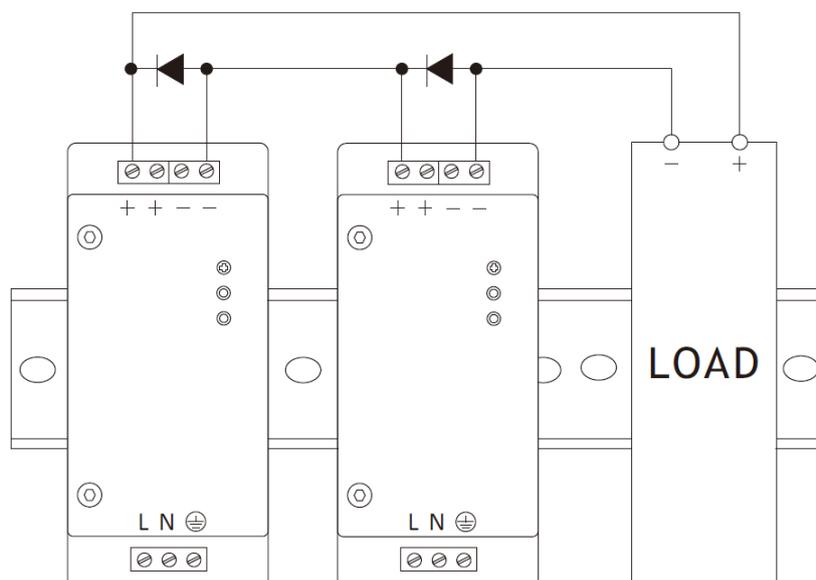

Scheme A: Single 48V load

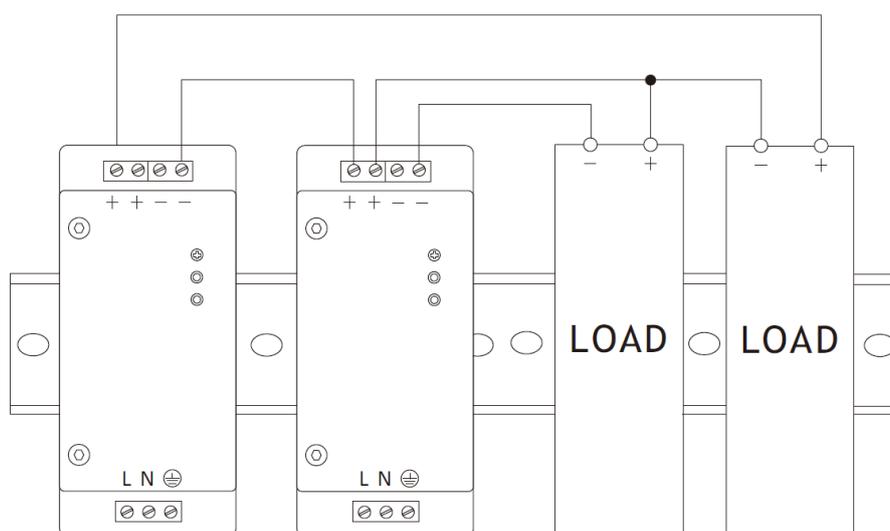

Scheme B: Two 24V loads in series

Notes:

1. Load current must be no more than the load current of the smallest power supply.
2. It is recommended to use products of the same model number in series.
3. Choose diodes for maximum power supply current