



Omni Audible (Single Tone Panel Mount)

Model C1176A Omni Audible .

DATASHEET

FEATURES


- **Panel Mounted**
- **IP54 Rating**
- **Pulsed or Continuous Tone**
- **4 – 28Vdc operation**
- **Wide operating temperature range**
- **Compatible with Omni8/16 Family**

The C1176A Omni Audible Warning Device is compatible with the entire range of Omniflex alarm annunciators, providing an audible alert when alarms occur. The Omni Audible mounts in a round hole on the



panel providing a continuous or pulsed tone when energised. Wide operating voltage up to 28Vdc allows operation in most indoor control room applications.

MECHANICAL DETAILS

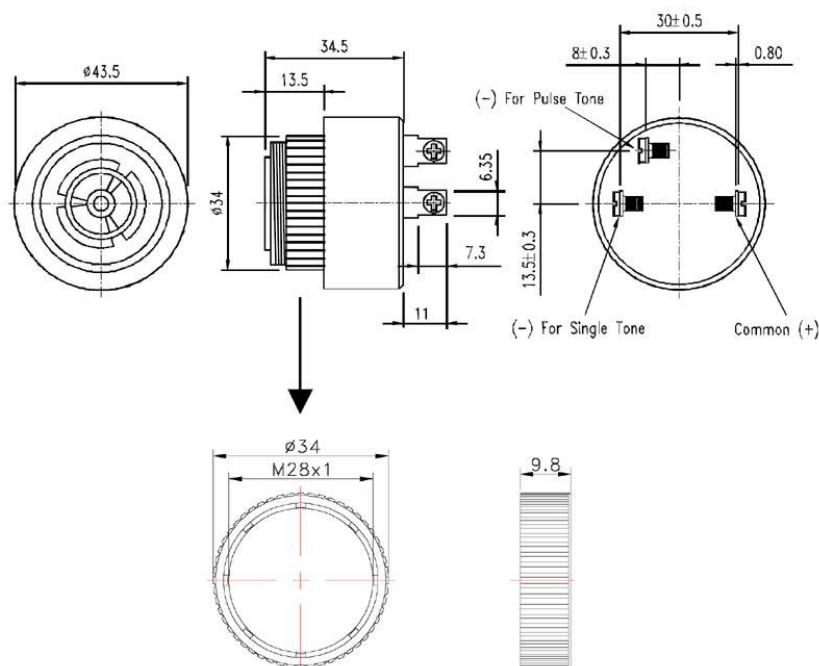

SPECIFICATIONS

Electrical

Operating Voltage	4-28Vdc
Rated Voltage	24Vdc
Rated Current	30mA max at rated Voltage

Audible

Frequency	2.9kHz +- 0.5kHz
Sound Pressure	85dBA /30cm Minimum
Pulse/Continuous	Select with correct termination Pulse Rate : 0.8-1.2 Pulses/sec (when pulse selected)

Mechanical

Mounting Hole	30mm +-1mm
---------------	------------

Depth	32mm Behind Panel (+wiring) 13.5mm Front Panel (max)
Diameter	43.5 Behind Panel
Colour	Black
Termination	Screw Terminals/6.35mm Fast -On

Compliance to Standards

IP Rating	IP54
-----------	------

Ordering Information

Model Number	Description
C1176A	Omni Audible (Single Tone Panel Mount)