

# Innovation create new HMI vision




## mTV Machine TV Interface

Breaking through the architecture of HMI, we freed HMI from its traditional combination of LCD panel and touch screen. The compact mTV can connect various sized TVs or monitors with HDMI interface. This makes real-time display clearer and less limited.

- HD 720p High Resolution HDMI Output
- One Gigabit Ethernet Port
- Compact Design and DIN-rail Mountable
- Built-in 256MB Flash Memory
- SD Card Slot for Extension of Storage
- One USB Host Port
- Fan-less Cooling System
- Supports MPI 187.5K
- Power Isolator Inside

### Traditional Architecture

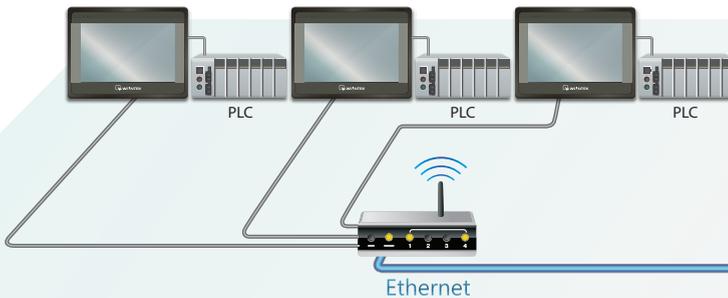


**HMI** Large touch screen  
Real-time on-site monitoring



Wider vision

**TV** Any Size  
Real-time on-site monitoring

### mTV Architecture

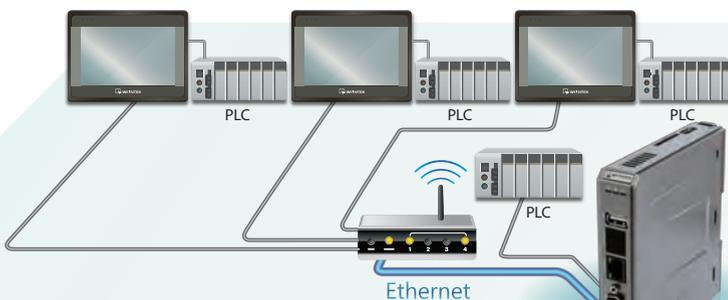


**mTV**  
(HDMI interface)

# mTV-100

## Machine TV Interface

### Dimensions

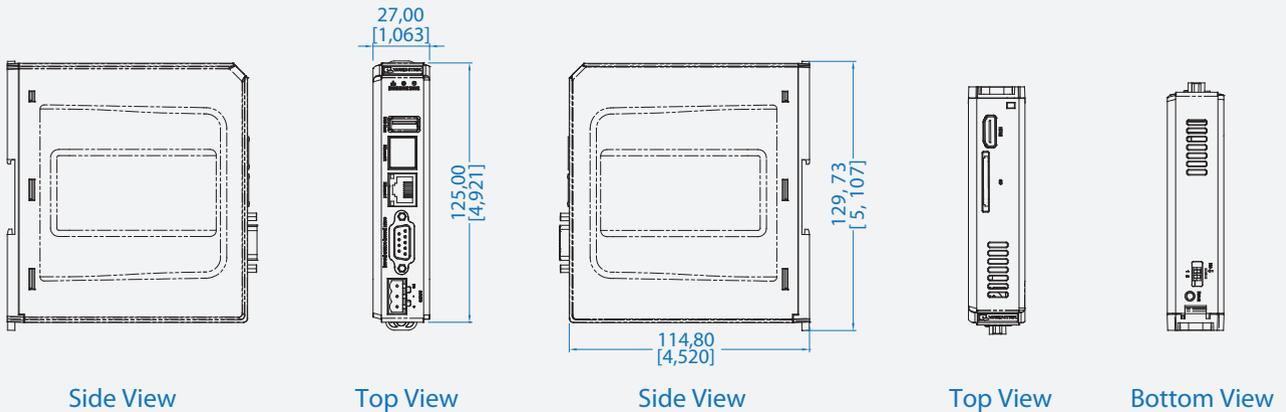

### Specification

Memory	Storage (MB)	256 MB
	RAM (MB)	256 MB
Processor		ARM Cortex A8 600MHz
I/O Port	SD Card Slot	SD/SDHC
	USB Host	USB 2.0 x 1
	USB Client	N/A
	Ethernet	10/100/1G x 1
	COM Port	COM1 RS-232, COM2 RS-485 2W/4W, COM3 RS-485 2W
	CAN Bus	N/A
	HDMI	Resolution 1280 x 720
RTC		Built-in (CR1225 3V lithium battery)
Power	Input Power	24±20%VDC
	Power Consumption	230mA@24V
	Power Isolation	Built-in
	Voltage Resistance	500VAC (1 min)
	Isolation Resistance	Exceed 50MΩ at 500VDC
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Specification	Enclosure	Plastic
	Dimensions WxHxD	130 x 115 x 27mm
	Weight (kg)	Approx. 0.18 kg
	Mount	35mm Din rail mounting
	Storage Temperature	-20° ~ 70°C (-4° ~ 158°F)
	Operating Temperature	-20° ~ 55°C (-4° ~ 131°F)
	Relative Humidity	10% ~ 90% RH (non-condensing)
Certificate	CE	EN 55022:2010
		EN 55024:2010
		EN 61000-3-2:2006+A2:2009
		EN 61000-3-3:2008
		AS/NZS CISPR 22:2009+A1:2010
UL	UL 508	
Software		EasyBuilder Pro V3.00.02 or later versions

\* Specifications subject to change without notice.



www.omniflex.com



ISO 9000: 2008

English | Sep 2013